



# Chicago Pneumatic



People.  
Passion.  
Performance.

Concrete Equipment

# YOUR PARTNER FROM START TO FINISH

For concrete projects, Chicago Pneumatic concrete equipment is with you every step of the way. From vibration and leveling to finish and cutting, CP offers a selection of quality equipment that helps you get the job done right.

CP doesn't overload its concrete equipment with extra features you don't need and will rarely use. Instead, CP concrete equipment is all about getting the day-to-day work done reliably, efficiently and affordably. It works hard like you do, and also like you it shows up ready to work the next day.



**Chicago  
Pneumatic**







## TIP

*After wet concrete has been vibrated a walk-behind screed is used to level the surface of the concrete.*

# Leveling **Made Easy**

Leveling fresh concrete doesn't have to wear you down. CP walk-behind screeds are light and easy to handle.


CP's walk-behind screeds are designed to provide a consistent, even surface without any guide or supporting tube. They're equipped with reliable Honda® engines and a rubber element to reduce H/A Vibrations. Plus, the ignition switch and throttle control are within easy reach for the operator to make quick adjustments.

The LBG 1200 hand-held screed provides surface vibration only. It's suitable for slabs of all sizes and medium to high slump concrete. The LBG 800 bull float screed provides deeper vibration and leveling in one step. It's recommended for smaller slabs and low to high slump concrete.

## Bull Float Screed



## Hand-Held Screed

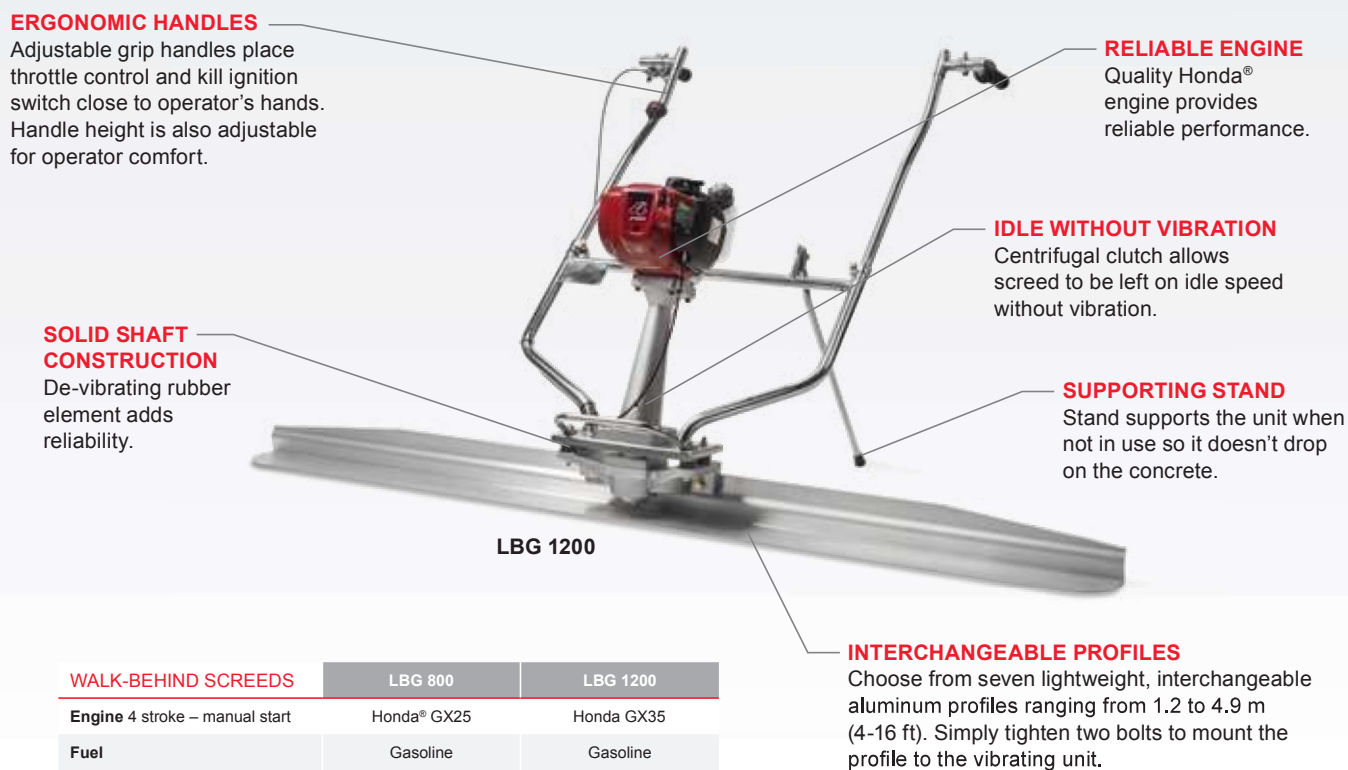

WALK-BEHIND SCREEDS	LBG 800	LBG 1200
Engine 4 stroke – manual start	Honda® GX25	Honda GX35
Fuel	Gasoline	Gasoline
Max Power kW (hp)	0.8 (1.1)	1.0 (1.3)
Rated Speed rpm	3000	9500
Net Weight kg (lb)	18 (40)	13 (29)
Handle Type	Long (up to 4.5 m / 15 ft)	Short
Profile Length m (ft)	2 (7)	See chart at right <sup>1</sup>
H/A Vibrations m/s <sup>2</sup> *	3.89	9
Sound Power dB(A)*	80	50
Part Number	4812 0550 09	4812 0550 12

\* Full details on measurement are available in the Safety and Operating Instruction of the product. It can be found on [www.cprintshop.com](http://www.cprintshop.com).

<sup>1</sup> Profiles and vibrating unit are ordered separately.

PROFILES FOR LBG 1200		Length	Weight
LBG 1200 12	Part No. 4812 0550 13	1.2 m (4 ft)	2.9 kg (6 lb)
LBG 1200 18	Part No. 4812 0550 14	1.8 m (6 ft)	4.4 kg (10 lb)
LBG 1200 24	Part No. 4812 0550 15	2.4 m (8 ft)	5.8 kg (13 lb)
LBG 1200 30	Part No. 4812 0550 16	3.0 m (10 ft)	7.3 kg (16 lb)
LBG 1200 37	Part No. 4812 0550 17	3.7 m (12 ft)	8.7 kg (19 lb)
LBG 1200 43	Part No. 4812 0550 18	4.3 m (14 ft)	10.2 kg (23 lb)
LBG 1200 49	Part No. 4812 0550 19	4.9 m (16 ft)	11.6 kg (26 lb)