



## AIRDRAULIC BIRCO GROUP PTY LTD

**Sydney (H.O.):** Unit 1, 33-35 Gibbes Street Chatswood NSW 2067

Phone: 61 2 9882 3444 Fax: 61 2 9882 3133

**Brisbane:** Unit 27, 121 Kerry Road, Archerfield QLD 4108

Phone: 61 7 3255 6188 Fax: 61 7 3255 6199

**Melbourne:** 165 Clayton Rd, Clayton VIC 3168

Phone: 61 3 9544 1711 Fax: 61 3 9544 2111

**Perth:** Unit 2, 73 Poole Street, Welshpool WA 6106

Phone: 61 8 9258 4144 Fax: 61 8 9258 4255

Website: [www.abgpl.com.au](http://www.abgpl.com.au) Email: [sales@abgpl.com.au](mailto:sales@abgpl.com.au)



A B N 47 002 890 477

A C N 002 890 477

# Y19 & Y26 HAND HELD ROCK DRILLS


The Y19 is the ideal tool for your light drilling operations. The streamlined designed incorporates smooth contours and a yoke for the acceptance of an independent air leg if so required. Thus making the Y19 easy to handle in small quarries, mines, civil and road construction work. The design also provides a main valve and cylinder-ported concept that helps maintain constant drilling speed throughout a long service life.

The Y26 is the ideal tool for your drilling operations. The streamlined designed incorporates smooth contours, a side exhaust and a flat back that makes the Y26 easy to handle in mines and general excavation work. The design also provides a main valve and cylinder-ported concept that helps maintain constant drilling speed throughout a long service life. Working parts are constantly protected by an effective lubricating system.

### CHECK THIS FEATURES AGAINST MANY OF MORE EXPENSIVE ROCK DRILLS

- Forged steel housing withstand rugged use
- Cushioned piston reduces shock
- Multi-position throttle for easy starting of holes
- Dual drilling speed
- Blower lever for deep hole drilling (Y26 only)
- Yoke for connection of an independent air leg (Y19 only)
- Integral oilier provides continuous lubrication (Y26 only)
- Air inlet swivel improves maneuverability

Airdraulic Birco Group carries a full range of spare parts for both the Y19 and Y26 and with our usual commitment to service your downtime will be kept to a minimum.

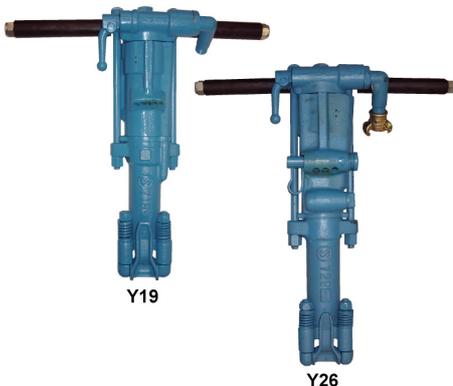

Y19

Y26

	Y19	Y26	FT100
<b>Overall Dimension (LxWxH)</b>	600x534x106 mm	650x465x125 mm	1340mm L
<b>Weight</b>	19kg	26kg	12kg
<b>Air Hose Inlet Diameter</b>	19mm	19mm	
<b>Cylinder Diameter</b>	65mm	65mm	Bore 56mm
<b>Piston Stroke</b>	54mm	70mm	1000mm
<b>Required Air Pressure</b>	5 Bar	5 Bar	
<b>Impact Energy</b>	>4kgf.m	>4.50 kgf.m	
<b>Blow Rate</b>	2100 bpm	1600 bpm	
<b>Air Consumption</b>	91cfm	100cfm	
<b>Water Hose Inner Diameter</b>	13mm	13mm	
<b>Working Water Pressure</b>	2-3Bar	2-3Bar	
<b>Drilling Hole Diameter</b>	16-42mm	16-42mm	
<b>Drilling Depth</b>	3.0mts	5.0mts	
<b>Shank Size</b>	22x108mm	22 x108mm	



### DISTRIBUTORS OF:

\*Edco Surface Preparation Tools \*Macdonald Air Tools \*Timberking Chainsaws \*Rock Drills \*Drilling Equipment \*Picket Post Driver \*Air Hose & Fittings  
 \*Compressors \*ASL Lubricators \* Stone Compaction Equipment \*Electric & Pneumatic Points & Chisels \*Pedestal & Wall Fans \*Mancoolers & Tube Fans  
 \*VAF Fans \*Venturi Air Movers \*Gas Heaters \*Submersible Pumps \*Transfer Pumps \*Puddle Pumps \*Layflat hose and fittings \*Bauers & Camlocks  
 \*Blast Hole Plugs \*Anfo Loaders \*Slopemeters \*Schroeder Hydraulic Filters & Elements \*CBC Reversing Cameras \*Reversing Alarms \*Osha Safety Valve